


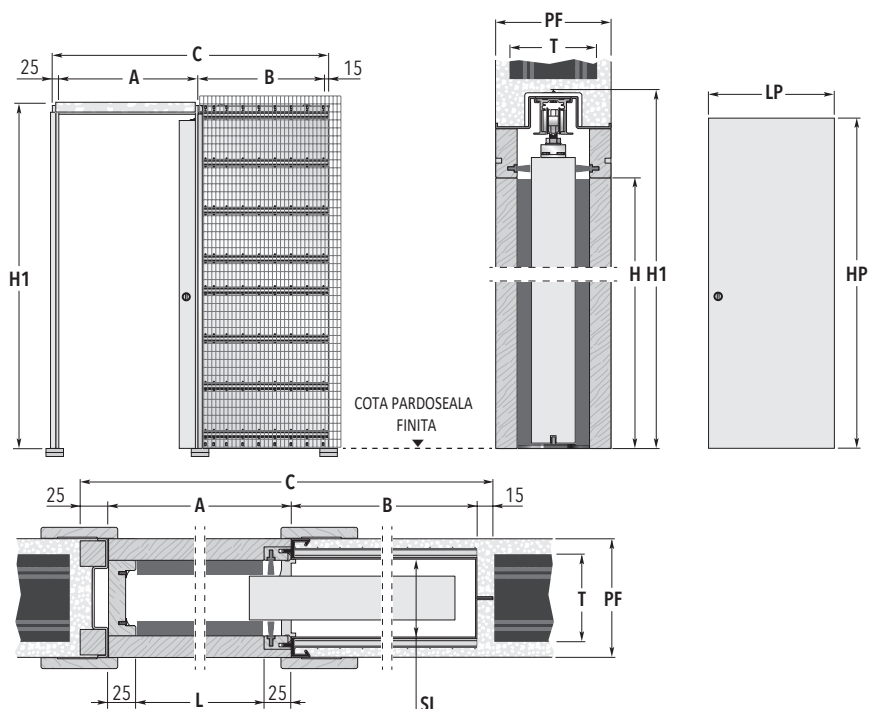

DIMENSIUNI STANDARD

GOL DE TRECERE UTIL L x H	EXTERIOR TOC C x H1	A	B	PANOUL USA (LEMN)	
				LP	HP
600 x 2000/2100	1315 x 2090/2190	650	625	615 ÷ 635	2010/2110
650 x 2000/2100	1465 x 2090/2190	700	725	665 ÷ 735	2010/2110
700 x 2000/2100	1515 x 2090/2190	750	725	715 ÷ 735	2010/2110
750 x 2000/2100	1665 x 2090/2190	800	825	765 ÷ 835	2010/2110
800 x 2000/2100	1715 x 2090/2190	850	825	815 ÷ 835	2010/2110
850 x 2000/2100	1865 x 2090/2190	900	925	865 ÷ 935	2010/2110
900 x 2000/2100	1915 x 2090/2190	950	925	915 ÷ 935	2010/2110
950 x 2000/2100	2065 x 2090/2190	1000	1025	965 ÷ 1035	2010/2110
1000 x 2000/2100	2115 x 2090/2190	1050	1025	1015 ÷ 1035	2010/2110

	PF	H	T	SI	
90	→	90	500÷2100	60	54
108	→	108	500÷2600	80	72
125	→	125	500÷2600	100	89
		125 Carucioare pentru 150 kg	2650÷2900	100	79
150	→	150	500÷2600	120	114
		150 Carucioare pentru 150 kg	2650÷2900	120	103

dimensiuni exprimate in mm

LEGENDA	TEHNIC	ACCESORII COMPATIBILE
L Gol de trecere util - Latime	▶ Se realizeaza din 50 in 50 de mm;	▶ ECLISSE BIAS®
H Gol de trecere util - Inaltime	▶ La sistemele cu cota interna de 54 mm se folosesc panouri de usa cu grosime de maxim 40 mm (inclusiv alte adaosuri aplicate);	▶ ECLISSE BIAS®DS
C Exterior toc - Latime	▶ Greutate standard suportata 100 kg, la cerere 150 kg.	▶ Autoinchidere
H1 Exterior toc - Inaltime		▶ Motorizare
A Gol de trecere brut		▶ Profil Security
B Dimensiune caseta		▶ ECLISSE Push&Pull
LP Latime panou de usa		
HP Inaltime panou de usa		
PF Grosime perete finit		
T Grosime Caramida		
SI Cota interna caseta		