


ECLISSE CIRCULAR ESTENSIONE

PERETE ZIDĂRIE

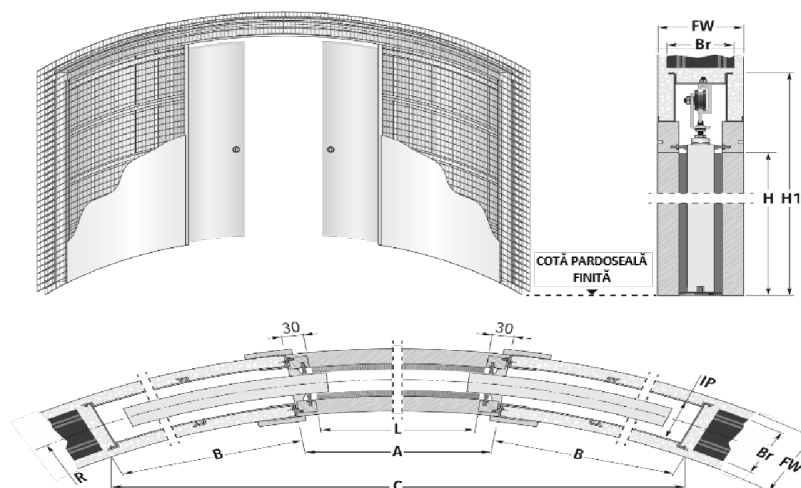

DIMENSIUNI STANDARD

RAZĂ	GOL DE TRECERE UTIL	EXTERIOR TOC			RAZĂ	GOL DE TRECERE UTIL	EXTERIOR TOC		
R	L x H	C x H1	A	B	R	L x H	C x H1	A	B
1000 →	1200 x 2000/2100	1870 x 2158/2258	1260	695	1700 →	1200 x 2000/2100	2330 x 2158/2258	1260	640
	1400 x 2000/2100	1840 x 2158/2258	1460	820		1400 x 2000/2100	2660 x 2158/2258	1460	780
1200 →	1200 x 2000/2100	2115 x 2158/2258	1260	665	1800 →	1600 x 2000/2100	2885 x 2158/2258	1660	870
	1400 x 2000/2100	2265 x 2158/2258	1460	800		1800 x 2000/2100	3065 x 2158/2258	1860	965
	1600 x 2000/2100	2295 x 2158/2258	1660	930		2000 x 2000/2100	3225 x 2158/2258	2060	1100
	1800 x 2000/2100	2180 x 2158/2258	1860	1055		1200 x 2000/2100	2355 x 2158/2258	1260	640
1300 →	1200 x 2000/2100	2180 x 2158/2258	1260	670	2000 →	1400 x 2000/2100	2685 x 2158/2258	1460	780
	1400 x 2000/2100	2345 x 2158/2258	1460	760		1600 x 2000/2100	2930 x 2158/2258	1660	875
	1600 x 2000/2100	2460 x 2158/2258	1660	895		1800 x 2000/2100	3135 x 2158/2258	1860	970
	1800 x 2000/2100	2455 x 2158/2258	1860	1025		2000 x 2000/2100	3325 x 2158/2258	2060	1105
	2000 x 2000/2100	2320 x 2158/2258	2060	1150		1200 x 2000/2100	2385 x 2158/2258	1260	645
1500 →	1200 x 2000/2100	2300 x 2158/2258	1260	680	2000 →	1400 x 2000/2100	2760 x 2158/2258	1460	785
	1400 x 2000/2100	2520 x 2158/2258	1460	770		1600 x 2000/2100	3030 x 2158/2258	1660	880
	1600 x 2000/2100	2730 x 2158/2258	1660	910		1800 x 2000/2100	3275 x 2158/2258	1860	975
	1800 x 2000/2100	2835 x 2158/2258	1860	1000		2000 x 2000/2100	3480 x 2158/2258	2060	1070
	2000 x 2000/2100	2875 x 2158/2258	2060	1130					
PERETE FINIT = FW		CĂRĂMIZI = Br			GOL DE TRECERE UTIL = IP				
125 →		100			72				

Dimensiuni exprimate în mm

DIMENSIUNI NON-STANDARD

- Lățimea golului de trecere 600 + 600 ÷ 1200 + 1200 mm;
- Înălțimea golului de trecere 1000÷2600 mm;
- Rază 1000 ÷ 5000 mm.

TEHNIC

- Greutate maximă suportată 80 kg;
- Montaj pe pardoseală finită.